


## MODEL 230.4 as of 15.1.04





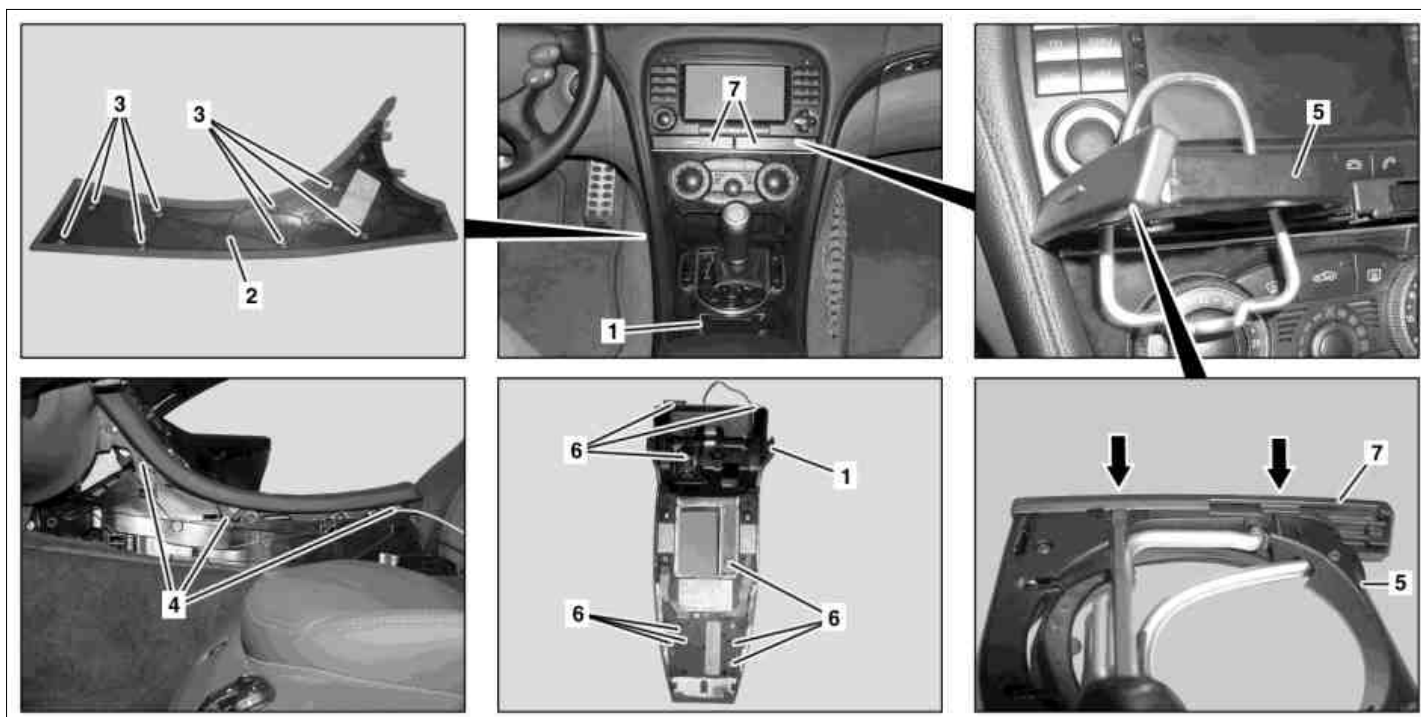



P68.20-3274-09

1 Center console cover  
2 Trim  
3 Retaining clips

4 Bolts  
5 Beverage holder

6 Electrical connections  
7 Beverage holder cover

 	Remove/install		
1	Move driver and front passenger seat downward and toward rear.		
2.1	Remove cover on gearshift lever	Except model 230.470 and except model 230.4 with code (P99) Special model "AMG Black Series"	AR68.20-P-2310R
2.2	Remove selector lever handle with covering	Model 230.470	AR27.60-P-0905AMG
2.3	Unscrew selector lever handle	Model 230.4 with code (P99) Special model "AMG Black Series"	
3.1	Move selector lever to position "D"	Vehicles with transmission 722	
3.2	Shift transmission to neutral	Vehicles with transmission 716	
4	Switch off ignition		
5	Unclip left and right paneling (2) from retaining clamps (3) with assembly wedge and remove.		*110589035900
6	Unscrew bolts (4) from center console on left and right side		
7	Open beverage holder (5) and unclip beverage holder cover (7) with screwdriver (arrows)		
8	Remove ashtray insert		
9	Open stowage box cover between seats		
10	Close beverage holder (5) and lift center console cover (1) until connectors on electrical connections (6) are accessible.		
11	Release connectors on electrical connections (6) and disconnect	 Number of connectors varies according to vehicle model designation and special equipment.	
12	Remove center console cover (1)	 Carefully handle center console cover (1) to prevent damaging center console and center console cover (1)!	
13	Install in the reverse order		



110 589 03 59 00

Mounting wedge