


Shown without pulse wheels on the camshaft adjusters

- 1 Crank the engine at the crankshaft in
Turn the direction of engine rotation
(arrow) to 40° crank angle after ignition
TDC.

i The 40° marking (1) on the belt pulley must be aligned with the positioning edge (2) on the timing case cover.

The markings (3) on the camshaft adjusters face upward, and the markings (4) align with the contact surfaces on the cylinder head covers.

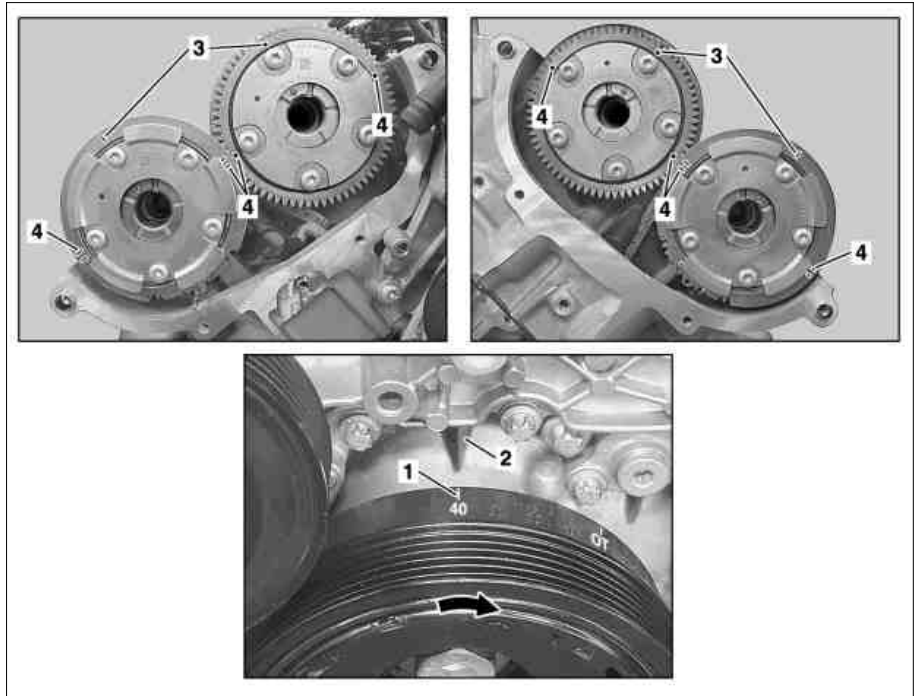

P05.20-2164-06