


Components required:

- A220 545 36 28, 14-pin SLK coupling (x1)
- A011 545 00 26, TB contact spring (x2)
- A035 545 47 28, TB contact pin \varnothing 2.5 mm (x2)
- An approx. 2 m long two-strand wire, wire cross-section 0.75 mm² (commercially available)

- 1 Insulate all strands of the wiring ends.
- 2 Provide both strands at one wiring end with contact springs and insert into contact cavities 5 and 6 of the SLK coupling.
- 3 Attach contact pins to the two strands at the other wiring end.

A Length approx. 2 m

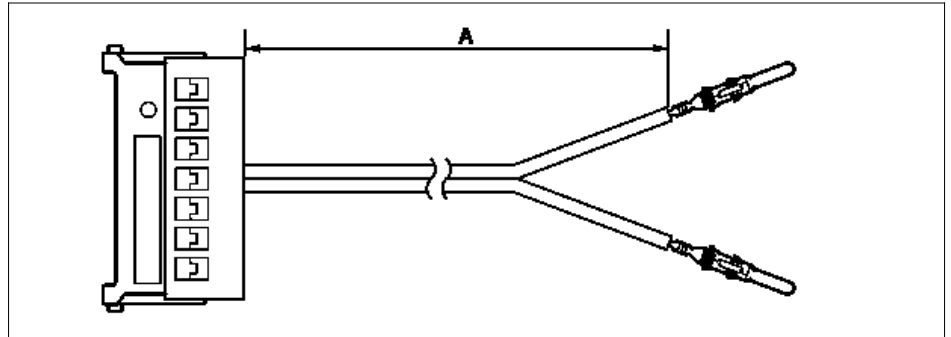

P58.50-2018-04