


MODEL 203, 209

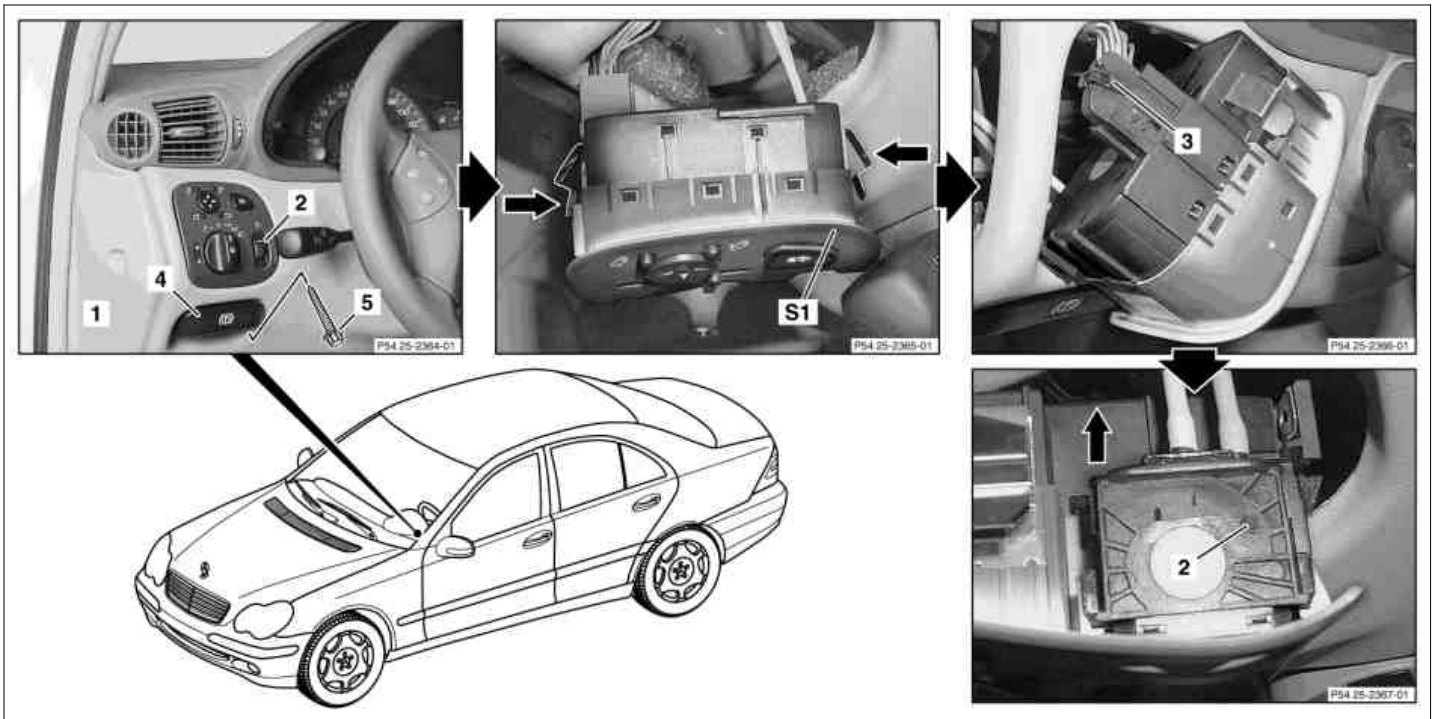

P54.25-2363-09

Illustrated on model 203.0

2 Headlamp range controller

5 Bolt

1 Side cover

3 Clutch

S1 Light switch module

4 Parking brake release

Modification notes

24.5.06	"Disconnect/connect ground line on battery" removed		
---------	---	--	--

	Remove/install		
1	Remove side cover (1)		
2	Remove screw (5)	i Pull out parking brake release (4).	
3	Unclip and remove lamp switch module (S1)	i Unclip in direction of arrow.	
4	Release connector (3) and disconnect		
5	Unlock headlamp range adjuster (2) and detach from lamp switch module (S1) (arrow)	Except code (612b) xenon headlamp unit	
6	Install in the reverse order		