





Illustrated on Model 203.0

- 1 Paneling
- 2 Cover
- 3 Front sliding jaws
- 4 Rear sliding jaws

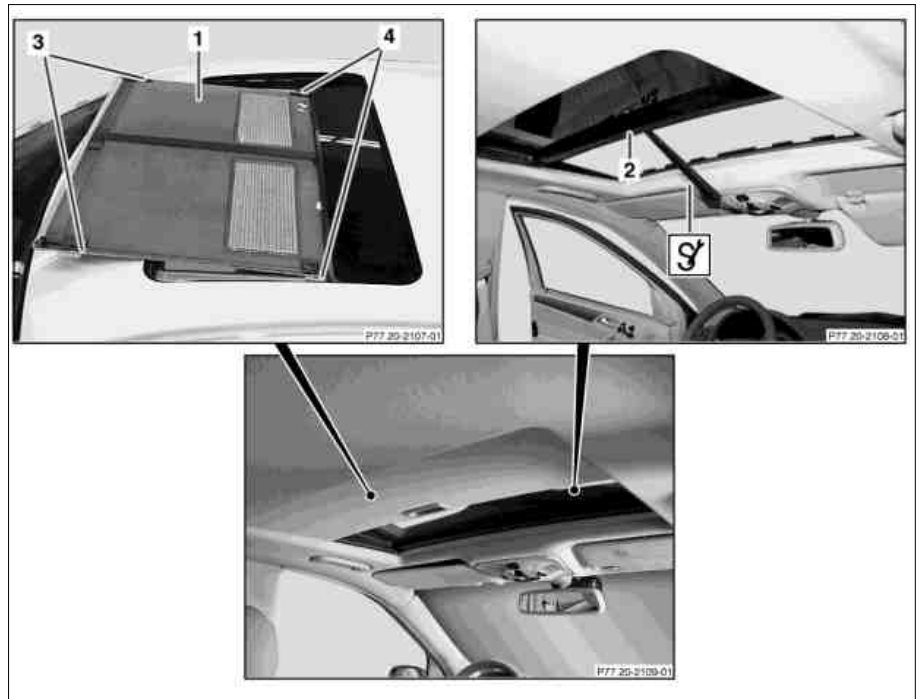

P77.20-2110-06

☒☒	Removing, installing		
1	Push paneling (1) toward rear		
2	Move sliding/pop-up roof approx. 20 cm toward rear		
3	Remove cover (2)	<p>i Model 203.0: Press cover (2) away in center with plastic wedge before removal</p> <p>i Model 203.2: Press cover (2) away at center and side with plastic wedge before removal.</p> <p>i Installation: Position cover from inside to outside.</p> <p>  Assembly wedge</p>	*110589035900
4	Move sliding/pop-up roof completely toward rear.		
5	Slide paneling (1) forward		
6	Unhook sliding jaws (3, 4) from sliding rail	i When unhooking push paneling (1) to side.	
7	Remove paneling (1)		
8	Install in the reverse order		



110 589 03 59 00

Assembly wedge