


MODEL 209

- 1 Door lining
- 2 Screw
- 3 Lock cover
- 4 Covering
- 5 SRS cover
- 6 Covering

- E17/3 Left door entrance/exit lamp
- E17/4 Right door entrance/exit lamp
- H4/23 Left front door mirror triangle speaker
- H4/24 Right front door mirror triangle speaker

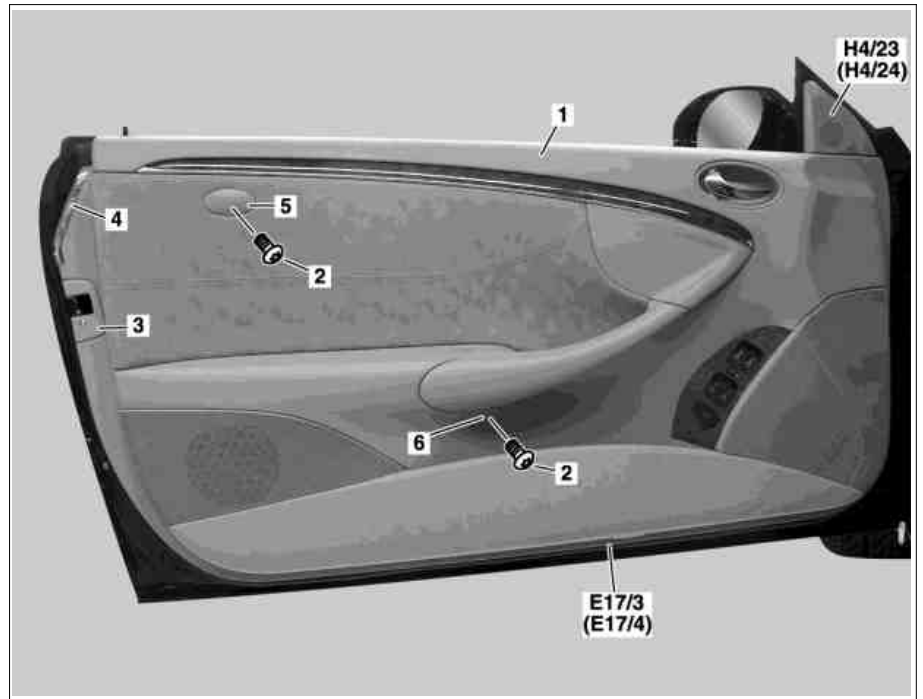


P72.10-2413-06

- 4 Covering
- 7 Bolts
- 8 Clips



P72.10-2414-01

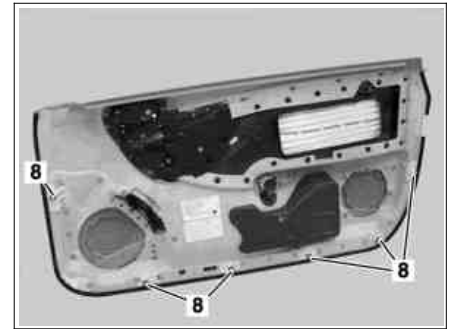


P72.10-2415-01

Modification notes

4.2.04	"Disconnect/connect battery ground line" removed		
--------	--	--	--

	Remove/install		
1	Unclip SRS covering (5)		On vehicles with sidebag
2	Unscrew bolt (2)		On vehicles with sidebag
3	Unclip covering (6)		On vehicles with sidebag
4	Unscrew bolt (2)		
5	Remove bolts (7)		
6	Remove covering (4)		
7	Unscrew bolt from lock cover (3)		
8	Remove lock cover (3)		
9	Remove left door mirror triangle speaker (H4/23) and right door mirror triangle speaker (H4/24) from mirror triangle		AR82.62-P-7850Q
10	Remove left door entrance/exit lamp (E17/3) and/or right door entrance/exit lamp (E17/4)		
11	Press door lining (1) off in areas of clips (8)	Mounting wedge	*110589035900
12	Pivot door lining (1) slightly and press off of sealing rail upward		
13	Unhook control cable from inner door actuation		
14	Disconnect electrical line on door lining (1) for left door control unit and right door control unit from door lining (1).		

15	Remove door lining (1)	i Check clips (8) for damage, replace if necessary	
16	Install in the reverse order		



110 589 03 59 00

Mounting wedge