


MODEL 209

- 1 Mirror lens
- 2 Retaining spring
- 3 Arresting lug
- 4 Electrical connectors

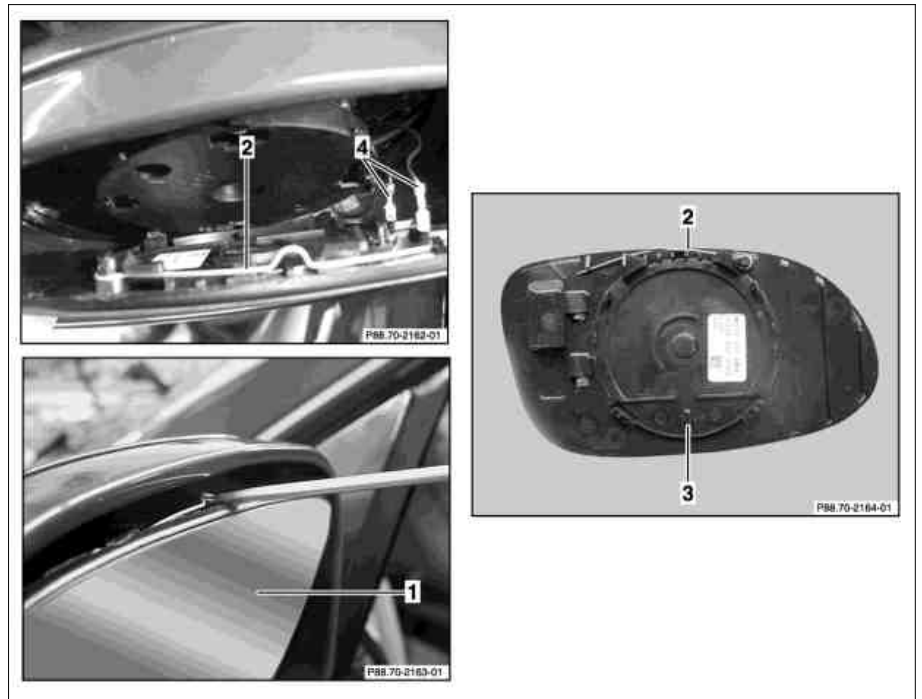


P88.70-2161-06

Modification notes

3.3.04	Disconnect/connect/remove ground lead from battery		
--------	--	--	--

	Remove/Install		
1	Move mirror glass (1) upward toward rear		
2	Unhook retaining spring (2)		
3	Unlock mirror glass (1) and remove	<b>i</b> <b>Installation:</b> First insert arresting lug (3) for mirror glass (1) into mirror adjustment drive.	*110589035900
4	Disconnect electrical connectors (4) from mirror heater		
5.1	Disconnect electrical connector from mirror dimming	On vehicles with code (249b) Automatic dimming inside and outside mirrors (driver)	
6	Install in the reverse order		
7	Clean mirror glass		
8	Perform function check		

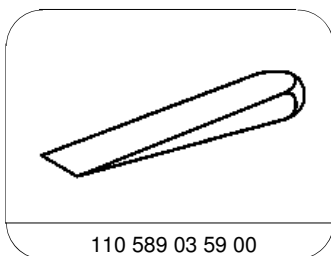

110 589 03 59 00

Mounting wedge