


MODEL 230.4

- 1 Bolts
- 2 Catch hook
- 3 Electrical connectors

N18/2 AAC [KLA] center and side air outlet control system

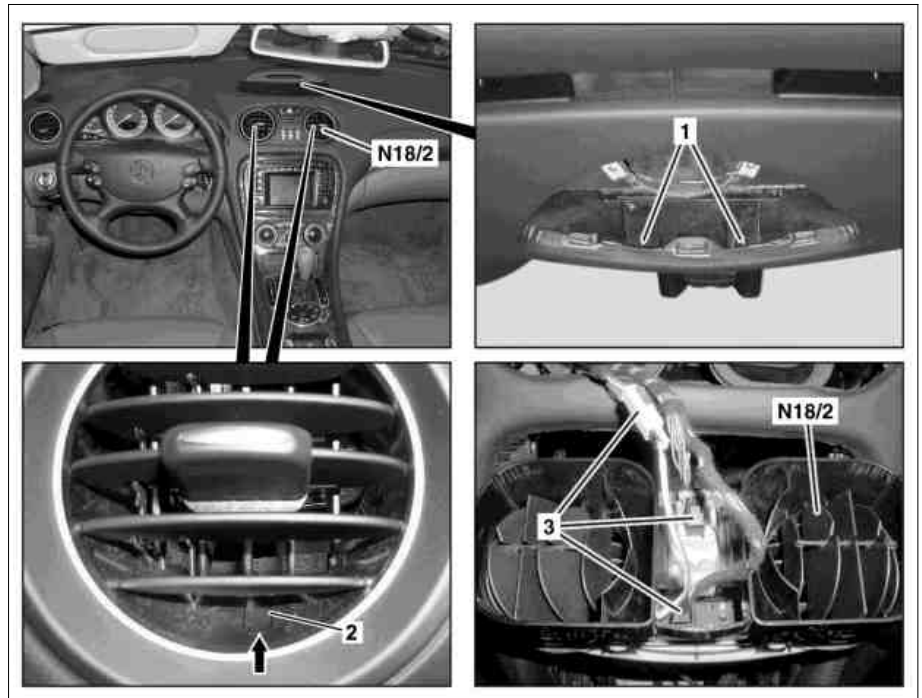

P83.10-2565-06

☒ ☒	Remove/install		
1	Remove cover for loudspeaker		AR68.10-P-1050R
2	Remove bolts (1)		
3	Release catch hooks (2) and pull AAC [KLA] center and side air outlet control system (N18/2) out of instrument panel	⚠ Do not pull on the flaps, otherwise the center and side air outlet control system will be damaged.	
4	Disconnect electrical connectors (3) and remove AAC [KLA] center and side air outlet control system (N18/2)		
5	Install in the reverse order		