


MODEL 230.4



P88.40-2375-09

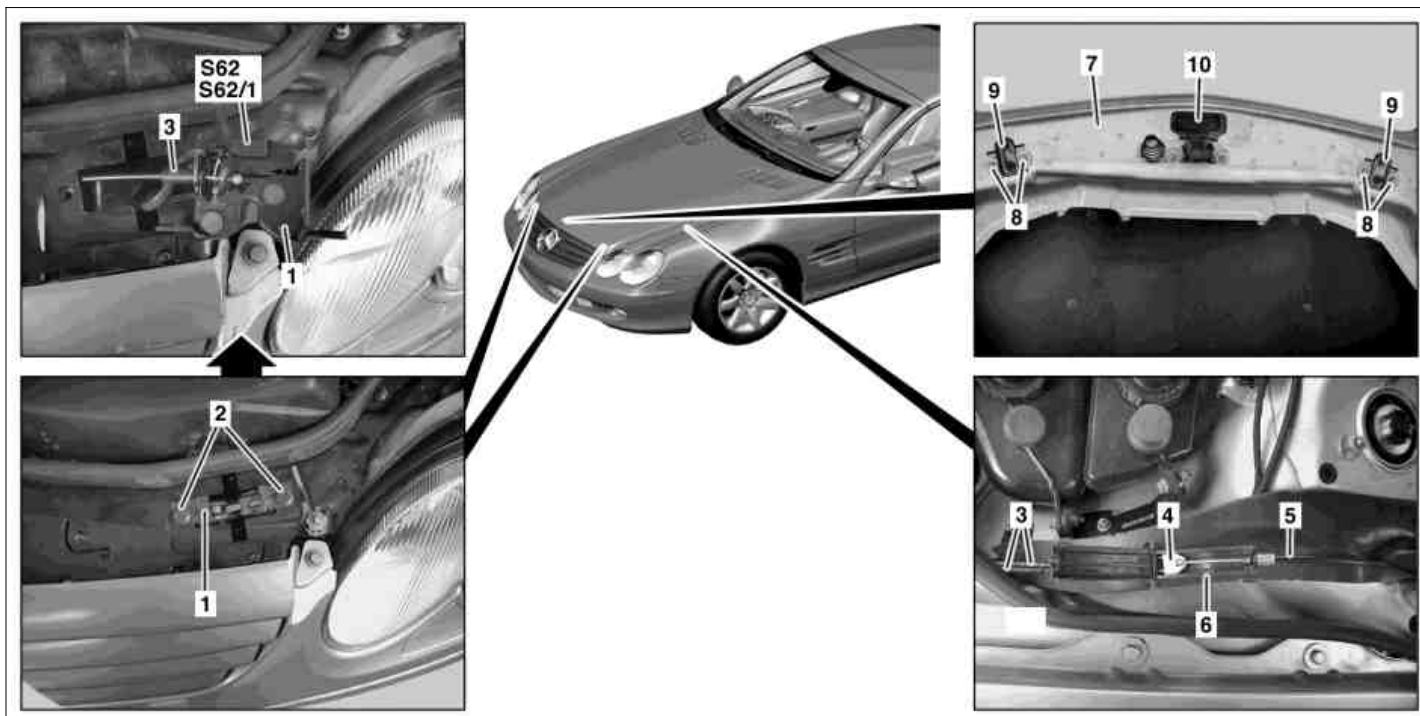




Shown on model 230.4 without code (P99)
Special model "AMG Black Series"

- 1 Lower section of engine hood catch
2 Bolts
3 Front engine hood cables

- 4 Clutch
5 Rear engine hood cable
6 Housing
7 Engine hood
8 Bolts

- 9 Upper section of engine hood catch
10 Safety hook

- S62 ATA [EDW] left engine hood switch
S62/1 ATA [EDW] right engine hood switch

 	Remove/install		
1	Open engine hood (7) and raise to vertical position		AR88.40-P-1000R
2	Remove air intake pipe upstream of air filter	Model 230.479 with engine 275.983 and code (P99) Special model "AMG Black Series"	AR09.10-P-1150RBS
3	Unhook housing (6) on wheel house, open and unhook rear engine hood cable (5) from coupling (4)	 Installation: Lock left and right engine hood catch bottom section (1) by hand and release on engine hood catching lever (7).	
4	Unscrew bolts (2) from left and right engine hood catch bottom section (1)		*BA88.40-P-1004-01D
5	Remove engine hood catch bottom section (1) from radiator crossmember and unhook corresponding front engine hood cable (3)		
6	Unclip left ATA engine hood switch (S62) or right ATA engine hood switch (S62/1) from engine hood catch bottom section (1) and remove		
7	Unscrew bolts (8) from engine hood catch top section (9) and remove engine hood catch top section (9)		*BA88.40-P-1003-01D
8	Install in the reverse order		
9	Check height adjustment for engine hood (7), correct if necessary		AR88.40-P-3020R

 Engine hood

Number	Designation	Model 230
BA88.40-P-1003-01D	Bolt on engine hood catch top section	Nm 8
BA88.40-P-1004-01D	Bolt on engine hood catch	Nm 8