


MODEL 230.4## ## as of 064521 except CODE (803) Model year 2003

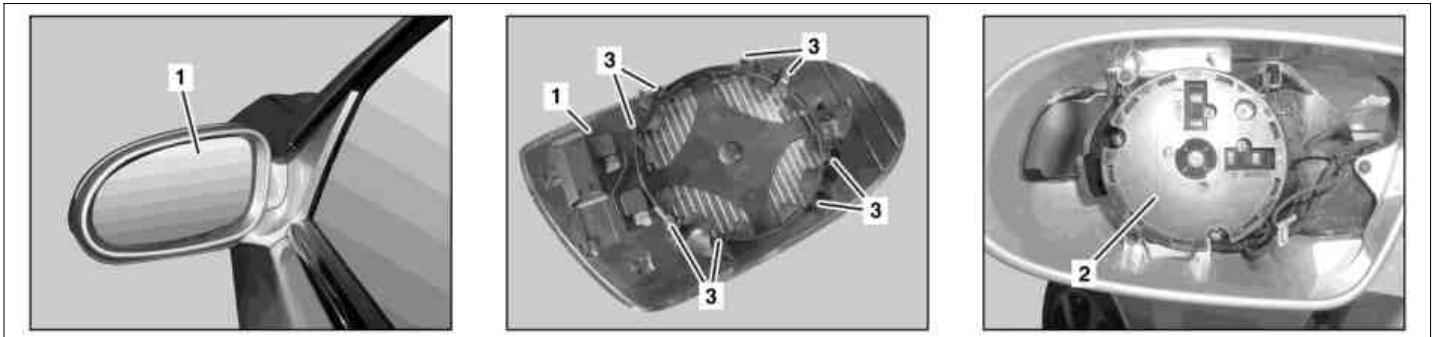

P88.70-2337-07

1 Mirror lens

2 Glass adjustment drive

3 Catch hook

☒ ☒	Remove/install		
⚠ Danger!	Risk of injury. Skin, eye and respiratory system irritation may occur through contact or inhalation of substances contained in the mirror lens.	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
1	Switch off ignition and remove transmitter key from EIS control unit	<p>i On vehicles with code (889) Keyless Go, press Keyless Go start/stop button repeatedly until ignition is switched off. Remove Keyless Go transmitter card or transmitter key from vehicle and store beyond reach of transmitter (min. 2 m).</p>	
2	Unclip mirror lens (1) from mirror adjustment drive (2).	<p>⚠ Carefully unclip mirror lens (1) to prevent breakage.</p> <p>i Installation: Ensure that all catch hooks (3) are arrested on mirror adjustment drive (2).</p>	
3	Disconnect electrical connectors and remove mirror lens (1)		
4	Install in the reverse order		