

Super Flux LEDs

LTL914SEKS

LTL914SHKS

LTL914SYKS

LTL914TBKS

LTL914TCKS

LTL914TGKS



Selection Guide

Part No.	Color	Φv (mlm)	Va(deg.)	λd (nm)
LTL914SEKS	Red	3750	30	628
LTL914SHKS	Red-Orange	3750	30	620
LTL914SYKS	Amber	2090	30	594
LTL914TBKS	Blue	550	30	470
LTL914TCKS	Cyan	1100	30	505
LTL914TGKS	Green	1600	30	525

Benefits

- Fewer LEDs Required
- Lower lighting System Cost

Applications

- Automotive Lighting
 - CHMSL
 - Stop Lamp
 - Rear Turn Signal Lamp
 - Front Turn Signal Lamp
 - Indirect Lighting
 - Signs and Signals



Features

- High Current Operation
- High Flux Output
- Low Thermal Resistance
- Low Profile
- Wide Viewing Angle
- Meet SAE/ ECE/ JIS Automotive Color Requirement
- Tube Package for Automatic Loading and Insertion Process

Description


These parts are designed for high current operation and high flux output applications. In order to solve the high temperature produced by the higher current operation, the package’s design features better thermal management characteristics than other LED solutions coupled with an efficient optical design.

This package design allows the lighting designer to reduce the number of LEDs required as well as the overall lighting system cost. The low profile package can be easily coupled to reflectors or lenses to efficiently distribute light and provide the desired illuminated appearance. This product family employs the world’s brightest red, red-orange, amber, blue, cyan, green, and white LED materials etc., which allow designers to match the color of popular lighting applications, such as automotive lighting and electronic signs.

Devices

Part No (LTL*)	Lens		Source	
	Color	Diffusion	Dice Source	Color
914SEKS	Water Clear	Non-Diffused	AllnGaP	Red
914SHKS	Water Clear	Non-Diffused	AllnGaP	Red-Orange
914SYKS	Water Clear	Non-Diffused	AllnGaP	Amber
914TBKS	Water Clear	Non-Diffused	InGaN	Blue
914TCKS	Water Clear	Non-Diffused	InGaN	Cyan
914TGKS	Water Clear	Non-Diffused	InGaN	Green

Package Dimensions

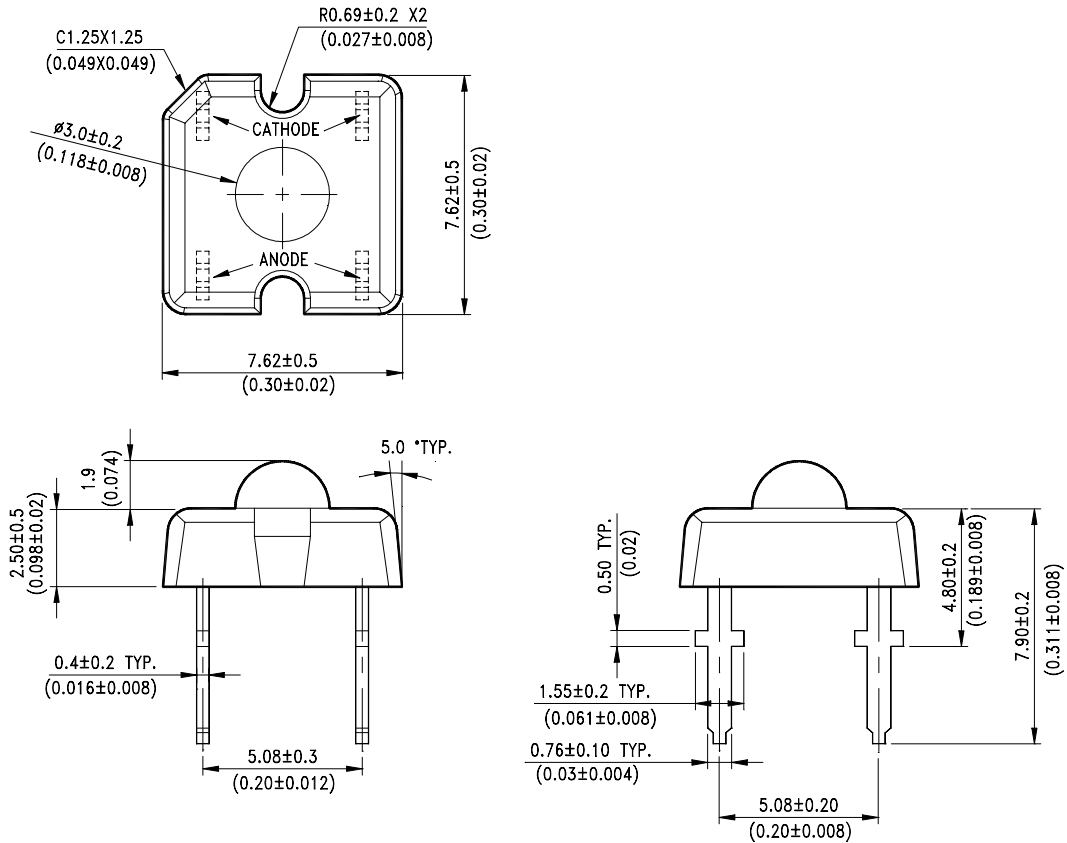

NOTES:

1. All dimensions are in millimeters (inches).
2. Protruded resin is 1.0mm(.04") max.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject change to without notice.



Absolute Maximum Ratings at TA=25°C

Parameter	AllnGaP<Note3>	InGaN<Note4>	Unit
Power Dissipation	242	235	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	100	mA
Continuous Forward Current	70	50	mA
AllnGaP Derating Linear From 60°C InGaN Deraing Linear From 55 °C <Note2>	0.875	0.667	mA/°C
Reverse Voltage (I _R =100 μA)	10	5	V
Operating Temperature Range	-40°C to + 100°C		
Storage Temperature Range	-55°C to + 100°C		
LED Junction Temperature	125°C		
Soldering Preheat Temperature	100°C for 30 Seconds		
Lead Soldering Temperature	260°C for 5 Seconds [1.5mm (.06") From Seating Plane]		

Notes:

1. Operation at currents below 10mA is not recommended.
2. Derating linear as shown in Fig. 4
3. AllnGaP devices: LTL91xSEKS, LTL91xSHKS, LTL91xSYKS.
4. InGaN devices: LTL91xTBKS, LTL91xTCKS, LTL91xTGKS.

Electrical / Optical Characteristics at T_A=25°C

Parameter	Symbol	Part No.	Min.	Typ.	Max.	Unit	Test Condition
Total Flux <Note1>	∅V	LTL914SEKS	1050	3750		mlm	IF=70mA
		LTL914SHKS	1050	3750			
		LTL914SYKS	1050	2090			
		LTL914TBKS	310	550			IF=50mA
		LTL914TCKS	470	1100			
		LTL914TGKS	700	1600			
Luminous Intensity / Total Flux	I _v / ∅V	LTL914SXKS		2.0		mcd /mlm	IF=70mA
		LTL914TXKS		3.0			IF=50mA
Viewing Angle <Note2, Fig 5>	2θ 1/2	LTL914SXKS		30		deg	
		LTL914TXKS		30			
Peak Emission Wavelength <Fig 1>	λ _P	LTL914SEKS		638		nm	IF=70mA
		LTL914SHKS		626			
		LTL914SYKS		596			
		LTL914TBKS		465			IF=50mA
		LTL914TCKS		505			
		LTL914TGKS		518			
Dominant Wavelength <Note 3>	λ _d	LTL914SEKS		628		nm	IF=70mA
		LTL914SHKS		620			
		LTL914SYKS		594			
		LTL914TBKS		470			IF=50mA
		LTL914TCKS		505			
		LTL914TGKS		525			
Forward Voltage	V _F	LTL914SxKS	2.15	2.50	3.45	V	IF=70mA
		LTL914TxKS	-	4.0	4.7		IF=50mA
Reverse Voltage	V _R	LTL914SxKS	10	20		V	I _R = 100 μA
		LTL914TxKS	5	10			
Thermal resistance	R _{θ J-PIN}			125		°C/W	

- Note:
1. ∅V is the total luminous flux output as measured with an integrating sphere.
 2. θ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
 3. The dominant wavelength, λ_d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Property of Lite-On Only

Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

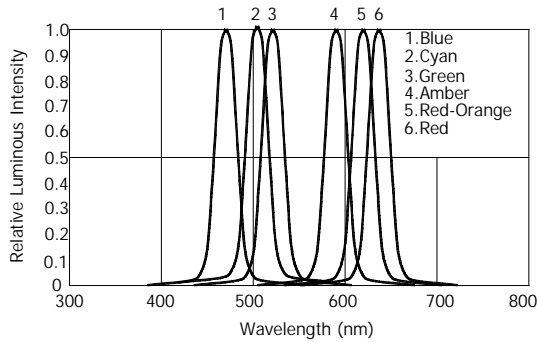


Fig.1 Relative Luminous Intensity vs. Wavelength

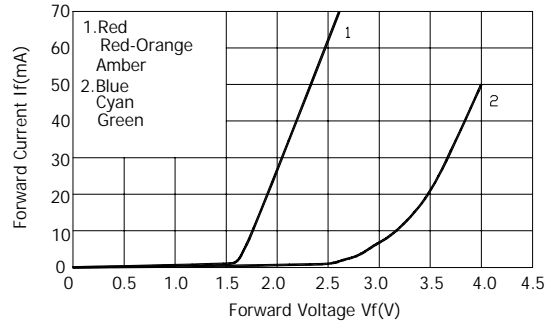


Fig.2 Forward Current vs. Forward Voltage

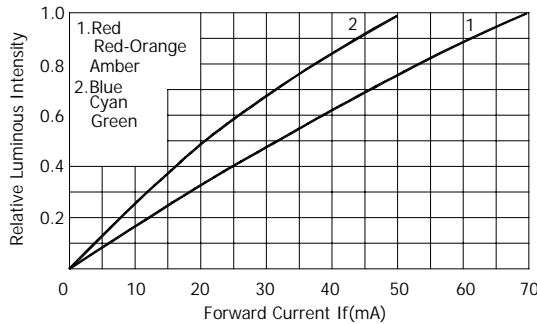


Fig.3 Relative Luminous Flux vs Forward Current

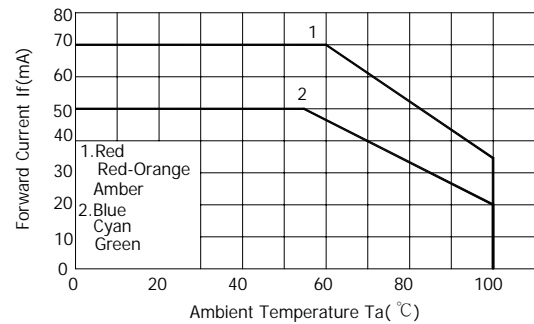


Fig.4 Forward Current vs. Ambient Temperature
($R_{\theta j-a}=300\text{ }^{\circ}\text{C/W}$)

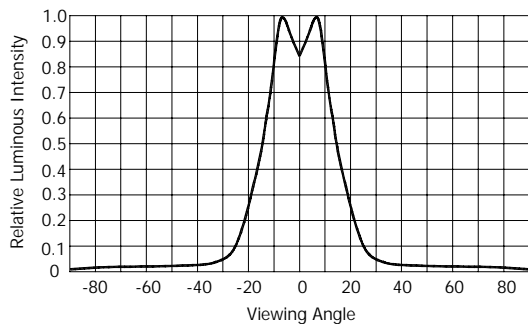


Fig.5a LTL914SxKS
Relative Luminous Intensity vs. Viewing Angle

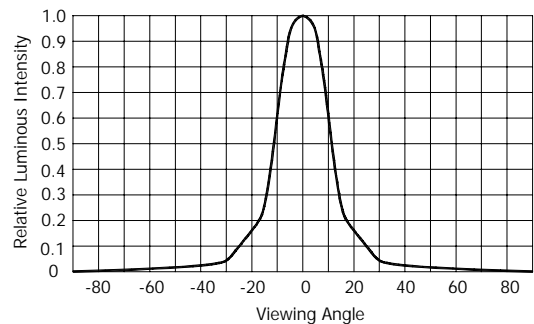


Fig.5b LTL914TxKS
Relative Luminous Intensity vs. Viewing Angle



Bin Table of Piranha LEDs

Bin Code: BIN F HUE H2

1. Luminous Flux Bin Table

Bin	Luminous Flux (lm)	
	Min.	Max.
3X	210	310
3Y	310	470
3Z	470	700
A	700	1050
B	1050	1570
C	1570	2090
D	2090	2600
E	2600	3130
F	3130	3650
G	3650	4170
H	4170	5300
J	5300	6350
L	6350	8430

Note: Tolerance of each bin limit is $\pm 15\%$

2. Hue Bin Table


Hue Bin	Red-Orange	
	Min.	Max.
H1	613	616
H2	616	619
H3	619	631
Hue Bin	Amber	
	Min.	Max.
Y0	586	588
Y1	588	590
Y2	590	593
Y3	593	596
Y4	596	599
Y5	599	602
Hue Bin	Blue	
	Min.	Max.
B2	460	465
B3	465	470
B4	470	475
B5	475	480
Hue Bin	Cyan	
	Min.	Max.
C1	490	495
C2	495	500
C3	500	505
C4	505	510
Hue Bin	Green	
	Min.	Max.
G1	510	515
G2	515	520
G3	520	525
G4	525	530
G5	530	535
G6	535	540

Note: Tolerance of each bin limit is $\pm 2\text{nm}$

Packing Spec


1. Tube: 65pcs

Dim: 520mm x 9.6mm x 11.8mm

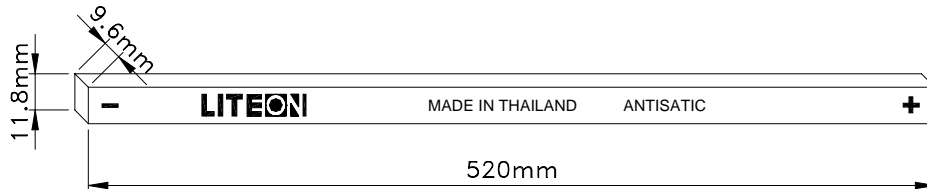

2. Inner carton: 187 tubes x 65 pcs = 12,155 pcs

Dim: 530mm x 175mm x 128mm

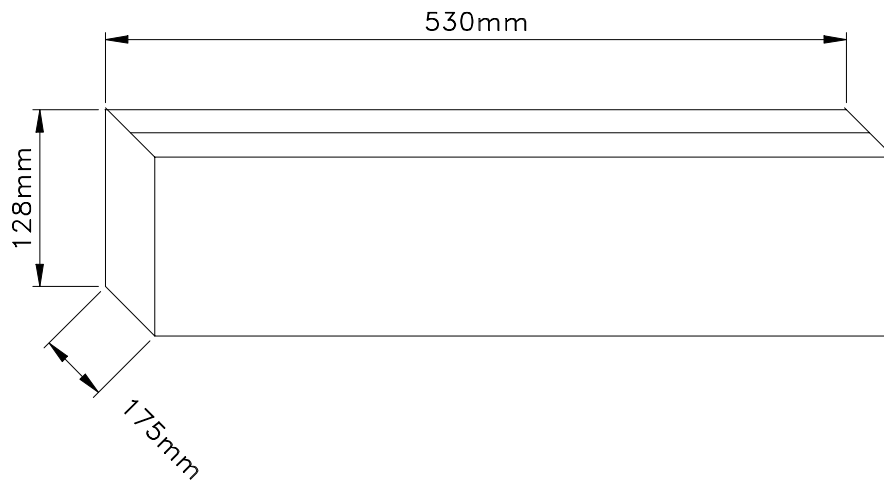

3. Outer carton: 4 inner cartons x 12,155 pcs = 48,620 pcs

Dim: 545mm x 370mm x 280mm

