


ENGINES 271.940 in MODEL 203.042 /242 /742, 209.342 /442
ENGINES 271.941 in MODELS 211.042 /242
ENGINES 271.946 in MODEL 203.046 /246 /746
ENGINES 271.948 in MODEL 203.040 /240 /740
ENGINES 271.921 in MODEL 203.730
ENGINES 271.955 in MODEL 209.341 /441
ENGINES 271.956 in MODEL 211.041 /241
ENGINES 271.942 in MODEL 203
ENGINES 271.957 in MODEL 203.741

Shown on engine 271.940

- 1 Air cleaner housing
- 2 Screw

B2/5 Hot film mass air flow sensor

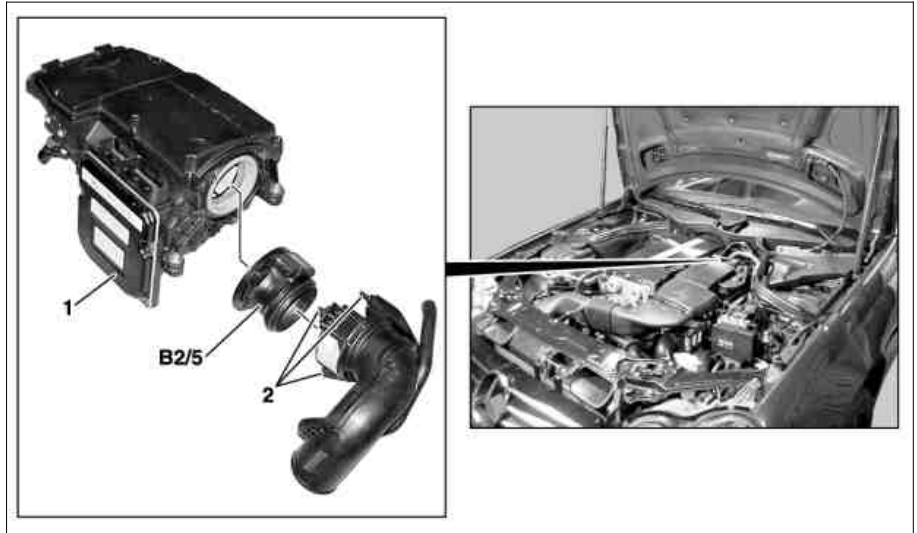

P07.07-2033-05

Modification notes

16.5.06	"Disconnect/connect battery ground line" removed	
---------	--	--

		Remove/install	
1		Open engine hood	Model 203 Model 209 Model 211 AR88.40-P-1000P AR88.40-P-1000Q AR88.40-P-1000T
2		Remove air filter housing (1).	AR09.10-P-1150Q
3		Loosen bolts (2) and remove hot film MAF sensor (B2/5)	
4		Install in the reverse order	
5		Read out fault memory and erase	ⓘ Stored faults which may be caused by assembly work, test work, removed lines or a simulation, must be processed and erased in fault memories after completing the work.
		Connect STAR DIAGNOSIS and read out fault memory	AD00.00-P-2000-04A