


MODEL 211.0 /2 /6 up to 31.5.06

MODEL 230.4## ## up to 064520 except CODE (804) Model year 2004

MODEL 240

Shown on model 230

- 1 Mirror lens
- 2 Retaining spring
- 3 Electrical connectors
- 4 Glass adjustment drive

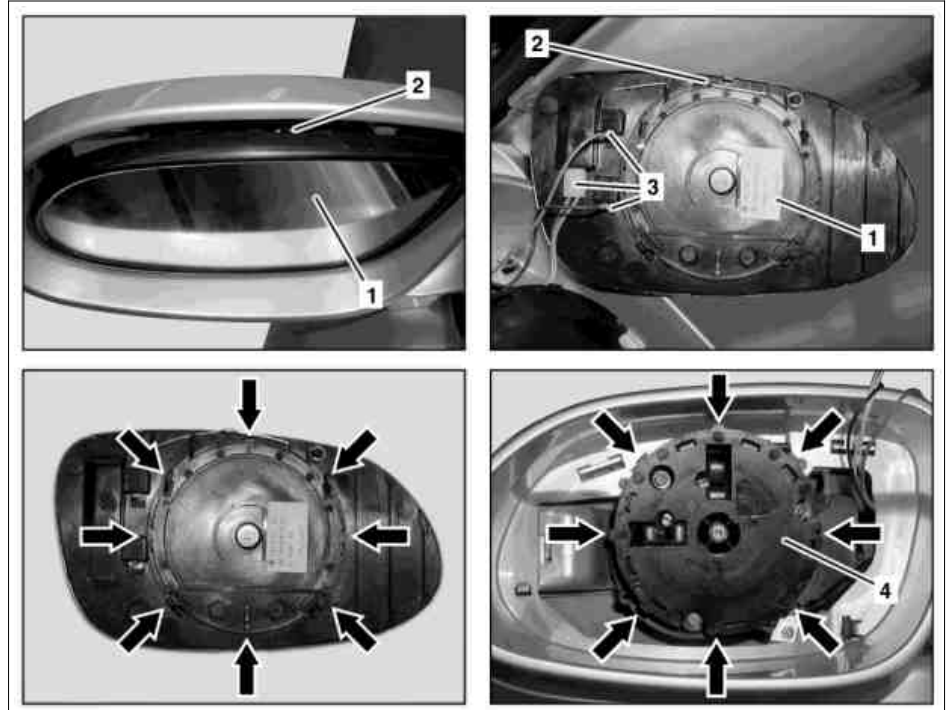


P88.70-2121-06

Modification notes

15.8.06	"Disconnect/connect battery ground line" removed	Model 240	
---------	--	-----------	--

	Remove/install		
<b>Danger!</b>	<b>Risk of injury.</b> Skin, eye and respiratory system irritation may occur through contact or inhalation of substances contained in the mirror lens.	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
1	Tilt out mirror lens (1) upward		
2	Press retaining spring (2) upward with suitable screwdriver and press mirror lens (1) away from glass adjustment drive (4) with mounting wedge.	<b>Installation:</b> Clip mirror lens (1) into glass adjustment drive (4) from bottom upward. Thereby observe retaining spring (2) and arrests (arrows) on mirror lens (1) and glass adjustment drive (4).	*110589035900
3	Disconnect electrical connectors (3) and remove mirror lens (1)		
4	Install in the reverse order		



Wedge tool