


MODEL 203.0, 209.3 with CODE (810) Sound system

Illustrated on model 203.0

- 2 Nuts
- 3 Fiber optic cable connector
- 4 Clutch
- A2/13 Sound amplifier

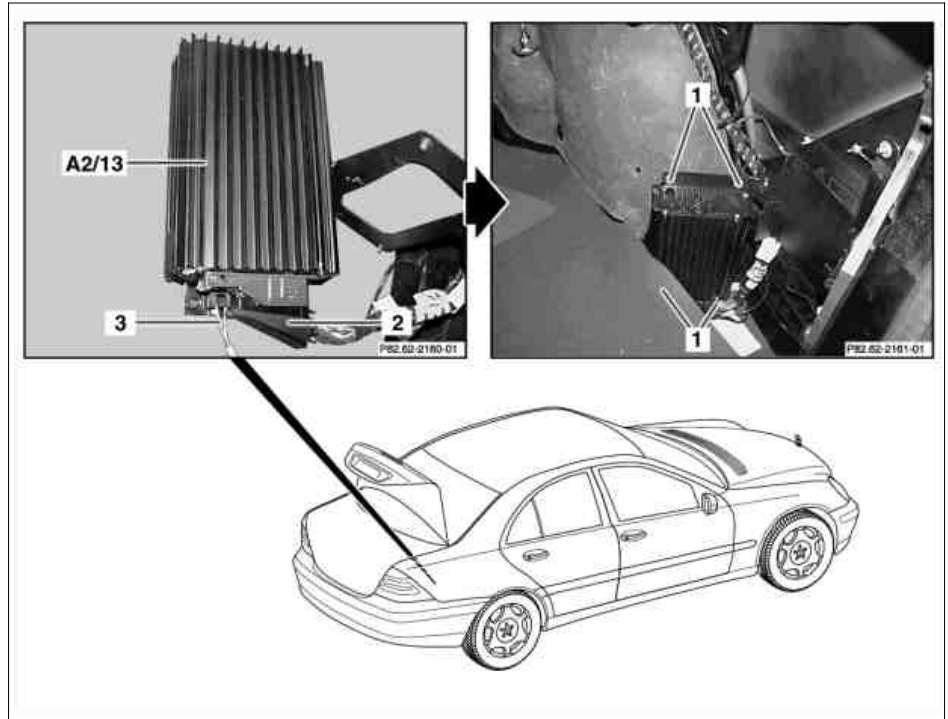

P82.62-2159-06

Modification notes

24.5.06	"Disconnect/connect ground line on battery" removed		
---------	---	--	--

Remove/install		
1	Remove right side paneling in trunk	Refer to: ↓ Model 203.0 Model 209.3
2	Unscrew nuts (2)	
3	Detach sound amplifier (A2/13) from mounting frame	
4	Disconnect fiber optic cable connector (3)	⚠ Do not kink or stretch the D2B fiber optic cable. ℹ Install caps on fiber optic cable connector and equipment connector. Refer to: ↓ Cover fiber optic cable
⚠	Notes on fiber optic cable	Model 129, 163, 168, 170, 202, 203, 208, 209, 210, 215, 220, 230, 463.243 /244 /245 /246 /247 /248 /249 /250 /254 /309 /322 /323 /332 /333
5	Disconnect connector (4)	
6	Install in the reverse order	

AR68.30-P-4600P
AR68.30-P-4600PB

AR82.95-P-0005-01A
AH82.70-P-0001-02A