


MODEL 209.3 /4

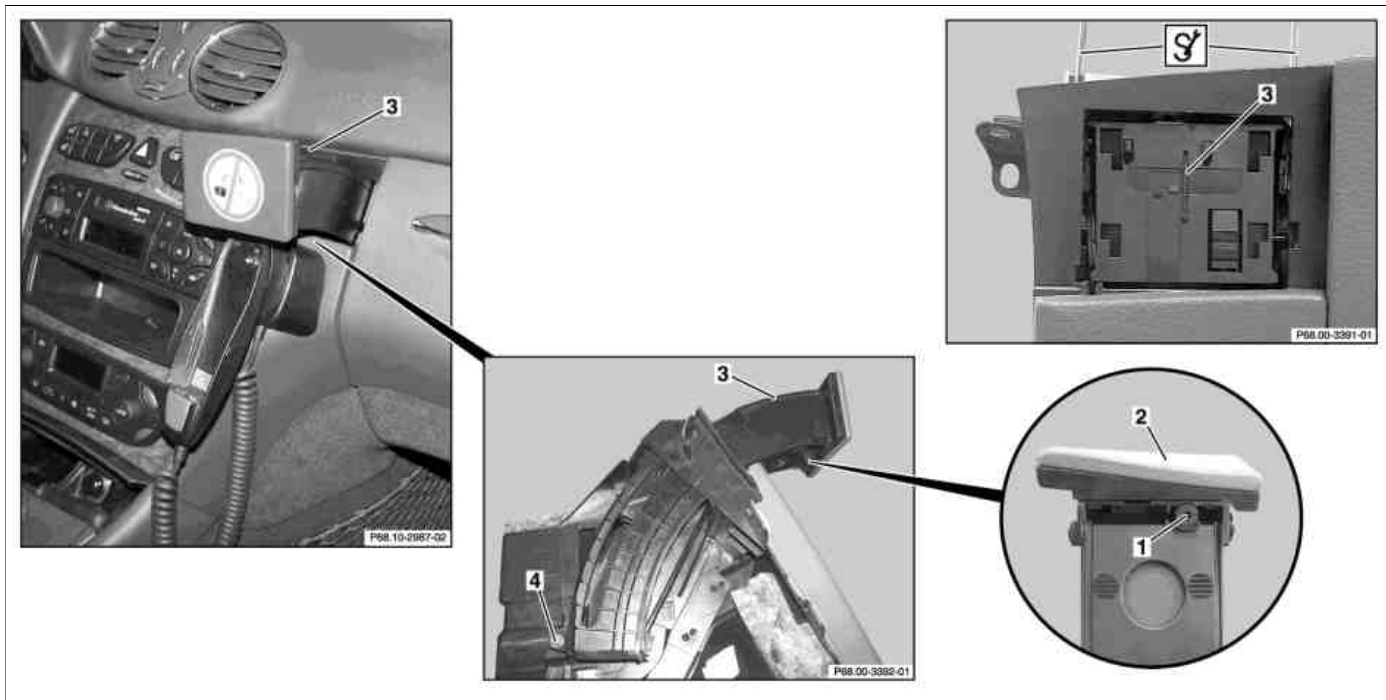


P68.10-2986-09

- |   |               |   |                     |   |      |
|---|---------------|---|---------------------|---|------|
| 1 | Arresting pin | 3 | Stowage compartment | 4 | Bolt |
| 2 | Cover         |   |                     |   |      |

**Modification notes**

|         |  |  |  |
|---------|--|--|--|
| 21.1.04 | Disconnect/connect/remove ground lead from battery |  |  |
|---------|--|--|--|

|   | Removal/installation   |  |                 |
|---|--|--|-----------------|
| 1 | Remove lower section of instrument panel on front passenger's side                             |  | AR68.10-P-1507Q |
| 2 | Turn arresting pin (1) approx. 90°   |  |                 |
| 3 | Slide cover (2) for stowage compartment (3) upward and remove                                  |  |                 |
| 4 | Unscrew bolt (4)   |  |                 |
| 5 | Unlock stowage compartment (3) from top  |  | *140589023300   |
| 6 | Remove stowage compartment (3) from passenger-side instrument panel bottom section toward rear |  |                 |
| 7 | Install in the reverse order   |  |                 |

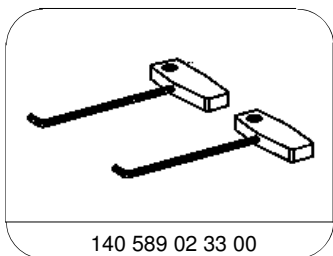

140 589 02 33 00

Pulling hook