


MODEL 209.3


Shown with code 414 Electric glass tilting/sliding roof

- 1 Rail
- 2 Sun visor
- 3 Grab handles
- 4 Cover
- 5 Headliner
- 16 Inside rearview mirror bracket

- A67 Inside rearview mirror unit
- N70 Overhead control panel control unit

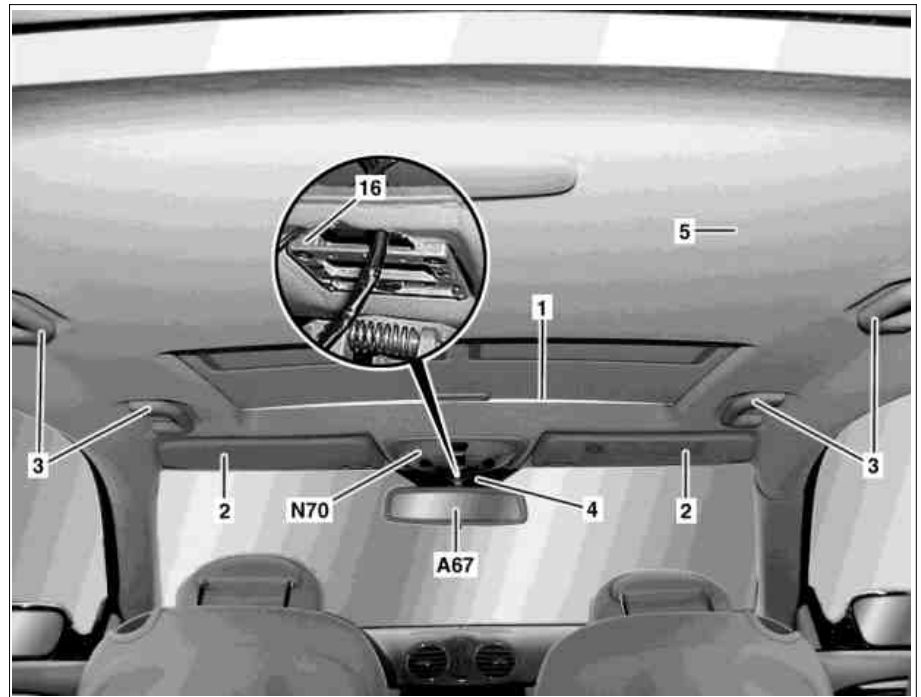

P68.30-3131-06

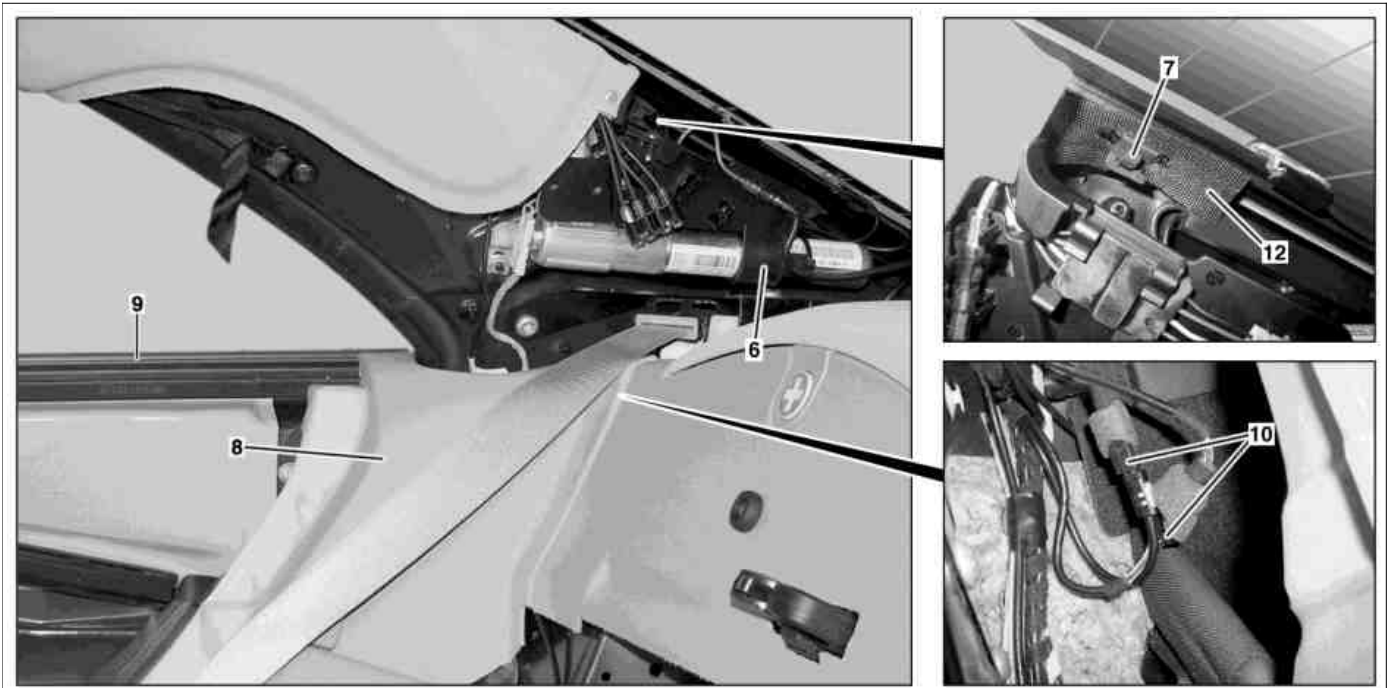

P68.30-3132-09


Shown on right side vehicle with code 273 D-net cell phone preinstallation

- 6 Antenna plug bracket
- 7 Clamp
- 8 Bottom side paneling
- 9 Sealing rail

- 10 Electrical connectors (with code 273 D-net cell phone preinstallation or code 329 Telephone preinstallation for AMPS system or code 386 Cell phone preinstallation, UPCI system or code 388 Cell phone, UPCI system or code 498 Japanese version or code 852 Complete cell phone preinstallation on dome or code 853 MB standard telephone or code 854 MB cell phone or code 855 TELE AID)
- 12 Retaining strap

Shown with code 414 Electric glass tilting/sliding roof, code 220 Parktronic system (PTS), code 882 Interior monitoring (with ATA only), code 273 D-net cell phone preinstallation and code 855 TELE AID

- 5 Headliner
- 10 Electrical connectors (with code 273 D-net cell phone preinstallation or code 329 Telephone preinstallation for AMPS system or code 386 Cell phone preinstallation, UPCI system or code 388 Cell phone, UPCI system or code 498 Japanese version or code 852 Complete cell phone preinstallation on dome or code 853 MB standard telephone or code 854 MB cell phone or code 855 TELE AID)

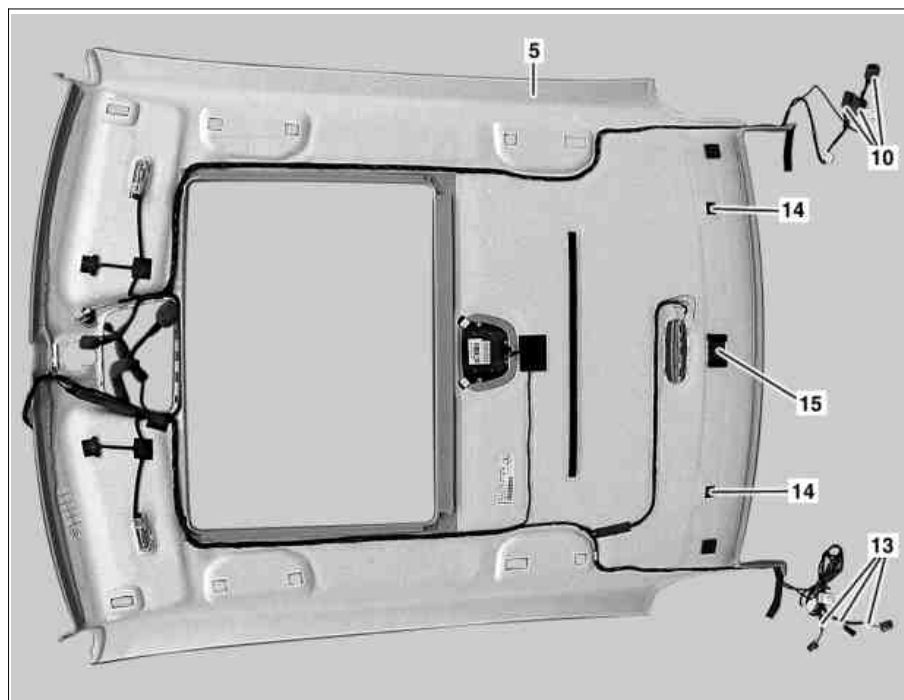

P68.30-3133-06

- 13 Electrical line
- 14 Velcro pad

15 Clamp

Modification notes

29.5.06	"Disconnect/connect battery ground line" removed		
---------	--	--	--

	Remove/install		
	Note on function reliability of windowbag		AH91.60-P-0693-01A
1	Move left and right front seats toward front		
2	Move left and right front seat backrest toward front	Vehicle without code P98 Black Series and without code 494 USA version	
3	Completely move side window in drive and passenger door downward		
4	Completely move left and right side window in rear downward		
5	Open tilting/sliding roof	Vehicles with code 414 Electric glass tilting/sliding roof	
6	Remove strip (1)	Vehicles with code 414 Electric glass tilting/sliding roof	
7	Remove paneling on left and right A-pillars		AR68.30-P-4050Q
8	Remove left and right sun visor (2).		
9	Remove counter bearing on left and right sun visor (2)		
10	Remove all handles (3)		AR68.30-P-4330P
11	Remove overhead control panel control unit (N70)	Vehicles without code P98 Black Series	AR82.20-P-1000Q
12	Remove inside rearview mirror unit (A67)		AR68.40-P-0001Q
13	Remove inside rearview mirror bracket (16)		
14	Remove cover (4) and disconnect electrical connector from rain/light sensor		
15	Remove paneling from left and right C-pillar		AR68.30-P-4490Q
16	Unclip antenna plug bracket (6) from left and right windowbag gas generator		
17	Remove clip (7) from left and right C-pillar		
18	Unhook retaining strap (12) from left and right C-pillar		
19	Remove top section from left and right side paneling in rear		AR68.30-P-4780Q
20.1	Fold back both rear seat backrests	Vehicles without code P98 Black Series	
20.2	Remove paneling in rear	Vehicles with code P98 Black Series	AR68.30-P-4782QBS

21	Unhook right bottom side paneling (8) from sealing rail (9) and move out at side below rear shelf until electrical connectors (10) are accessible.	On vehicles with code 273 D-net cell phone preinstallation or code 329 Telephone preinstallation, AMPS system or code 386 Cell phone preinstallation, UHI system or code 388 Cell phone, UHI system or code 498 Japan version or code 852 Complete cell phone preinstallation on dome or code 853 MB standard telephone or code 854 MB cell phone or code 855 TELE AID i Number of electrical connectors (10) according to equipment.	
22	Separate electrical connectors (10)	On vehicles with code 273 D-net cell phone preinstallation or code 329 Telephone preinstallation, AMPS system or code 386 Cell phone preinstallation, UHI system or code 388 Cell phone, UHI system or code 498 Japan version or code 852 Complete cell phone preinstallation on dome or code 853 MB standard telephone or code 854 MB cell phone or code 855 TELE AID i Number of electrical connectors (10) according to equipment.	
23	Unhook left bottom side paneling (8) from sealing rail (9) and move out at side below rear shelf until electrical lines (13) are accessible.		
24	Expose electrical lines (13) toward rear into trunk to rear SAM control module with fuse and relay module.	i Installation: Replace damaged fasteners.	
25	Disconnect electrical lines (13) from rear SAM control module with fuse and relay module.		AR54.21-P-1259Q
26	Lay electrical lines (13) toward front into vehicle interior.		
27	Loosen headliner (5) in rear area of Velcro pads (14) from roof paneling, slightly slide toward front and unhook from clip (15) and then remove headliner (5) from vehicle at side	i Aid of helper required.	
28	Prepare headliner (5) for installation	When replacing headliner (5).	AR68.30-P-4305Q
29	Install in the reverse order		