
Assignment of fuses in front prefuse box

1-7 Fuses

F32 Front prefuse box

X Direction of travel

i Multiple designations are available for fuses for model series 230.4.

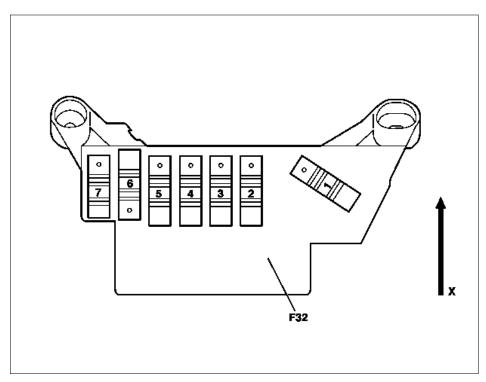

P54.15-2536-06

Fuse	Terminal	Cable ID (fused line)	Fused function	Rating in amperes (A)
f1	30	RD 10.0	Valid for engines 112, 113: ■ Engine and AC electric suction fan with integrated control (M4/7)	100
		RD 12.0	Valid for engine 275, SL55AMG, SL65AMG: ■ Engine and AC electric suction fan with integrated control (M4/7)	100
f2	30	RD 16.0	Valid for left-hand drive vehicles: ■ Passenger-side fuse and relay module (K40/4) Valid for right-hand drive vehicles: ■ Driver-side fuse and relay module (K40/2)	200
f3	30	RD 16.0	Valid for left-hand drive vehicles: ■ Driver-side fuse and relay module (K40/2) Valid for right-hand drive vehicles: ■ Passenger-side fuse and relay module (K40/4)	200
f4	30	RD 4.0	EIS [EZS] control unit (N73)	80
f5	30	RDGN 4.0	SBC hydraulic unit (A7/3)	40
f6	30	_	i Not used due to cable duct	-
f7	30	RDGN 4.0	Heating systems recirculation unit (A32)	40