


MODEL 209.3

- 1 Lens
2 Release



N70 Overhead control panel control unit

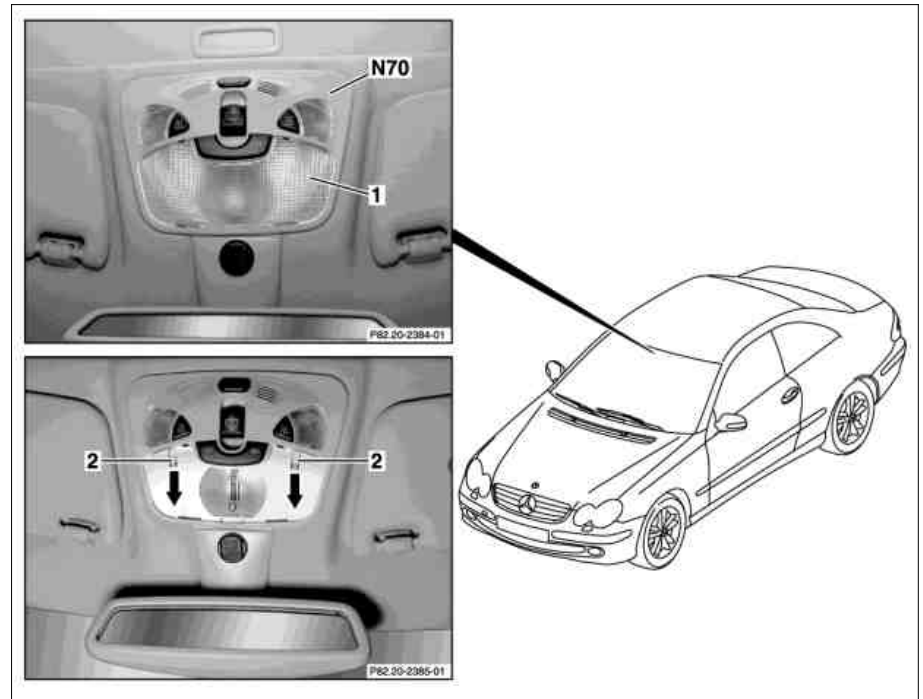


P82.20-2386-06

Modification notes

17.10.05	Disconnect ground line of battery, removed	Step 2	
----------	--	--------	--

	Remove/install		
1.1	Transfer basic data from overhead control panel control unit (N70) to STAR DIAGNOSIS	When installing new overhead control panel control unit (N70). i Installation: Transfer buffered basic data to new overhead control panel control unit (N70), and for code (414) Tilting/sliding roof, normalize the anti-pinch protection.	
 AD	Connect STAR DIAGNOSIS and read out fault memory	STAR DIAGNOSIS diagnosis system	AD00.00-P-2000-04A *WH58.30-Z-1048-13A
2	Remove transmitter key from electronic ignition switch control unit		
3	Pry off lens (1) from overhead control panel control unit (N70)	! Risk of cracks and fracture to headliner and overhead control panel control unit (N70). ! Mounting wedge	*110589035900
4	Press overhead control panel control unit (N70) release (2)	i Press in direction of arrow.	
5	Remove the overhead control panel control unit (N70)	! Installation: Excess pressure and tensile stress on the roof switch will damage the overhead control panel control unit (N70)	
6	Disconnect connectors from overhead control panel control unit (N70)		
7	Install in the reverse order		
8.1	Normalize tilting/sliding roof	i For vehicles with code (414) Tilting/sliding roof	
9	Read fault memory, erase if necessary Connect STAR DIAGNOSIS and read out fault memory	STAR DIAGNOSIS diagnosis system	AD00.00-P-2000-04A *WH58.30-Z-1048-13A



110 589 03 59 00

Mounting wedge

Commercially available tools

Number	Designation
WH58.30-Z-1048-13A	STAR DIAGNOSIS diagnosis system, Compact Passenger Car 6511 1801 00